

# Clark Shallow (ADA)

*Low Profile Luminaire*  
*Selectable Wattage & CCT*  
*Indoor Ceiling or Wall*

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## SPECIFICATIONS

- **DIFFUSER** — Opal white polycarbonate is standard.
- **DRIVER** — Universal Volt (120~277V) Electronic Driver. 0-10V Low Voltage Dimming (100% to 30%) is Standard.
- **FINISH** — Polyester powder coat white Standard. Optional Custom Colors.
- **GASKETING** — High temp, non-aging black EPDM gasketed seal. Seals diffuser to cast housing to protect against outside contaminants.
- **HOUSING** — Spun aluminum housing with built-in heatsinks for thermal management.
- **MOUNTING** — Indoor Surface, Wall or Ceiling.
- **COMPLIANCE** — Built to comply with U.S. and Canadian Safety Standards.

Made in USA / Buy America Compliant / Buy American Act.



## ORDERING INFO

ORDERING GUIDE:	Series	Wattage	CCT	Voltage	Finish	Options
-----------------	--------	---------	-----	---------	--------	---------

### SERIES

CK-S = Clark Shallow Series

### WATTAGE

Refer to Below Chart for Wattage / Lumen Output  
SLED = Selectable LED Wattages: 21W | 28W

### COLOR TEMPERATURE (CCT)

SCCT = Selectable CCT: 3000K | 3500K | 4000K | 5000K

### VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

### STANDARD FINISH

BK = Black Finish  
BZ = Bronze Finish  
PNA = Painted Natural Aluminum  
WH = White Finish Standard

### PREMIUM UPCHARGE FINISH

CC = Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
— Provide RAL# or Make-to-Match Color Chip  
+NAT = Conformal Coating - Light Engine Only

### CONTROL OPTIONS

**Sensor Control** (Sensor Integral to Fixture)

OCC = Occupancy Sensing | Motion Sensor Integral<sup>20</sup>  
— Microwave / Single Feed / 120/277V Only  
— Standby Dim Level Presets: ON/OFF (0%/100%)

### MISC OPTIONS

FUS = Single Fusing

### ACCESSORY OPTIONS (order as a separate line)

9002 = Tamperproof Screwdriver  
REMT = Remote Controller for Sensor Options

### NOTES:

<sup>20</sup> Max mounting height of fixture is 18' (18 feet)

## WATTAGE / LUMEN INFORMATION

Wattage	CCT	Lumens	Efficacy
21 Watt	3000K	3,100 Lumens	148 lm/W
	3500K	3,125 Lumens	149 lm/W
	4000K	3,150 Lumens	150 lm/W
	5000K	3,200 Lumens	152 lm/W
28 Watt	3000K	4,100 Lumens	144 lm/W
	3500K	4,125 Lumens	145 lm/W
	4000K	4,150 Lumens	146 lm/W
	5000K	4,200 Lumens	147 lm/W


# Clark Shallow (ADA)

*Low Profile Luminaire*  
*Selectable Wattage & CCT*  
*Indoor Ceiling or Wall*



We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		



## DIMENSIONS

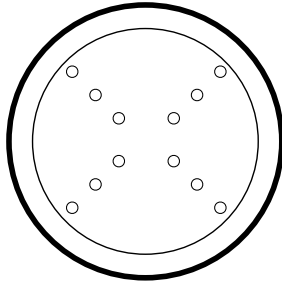

**Clark Shallow  
Series Mounting**

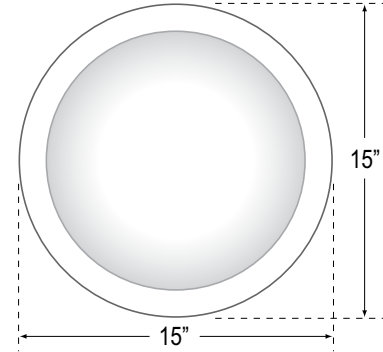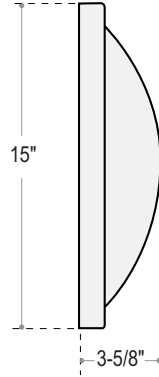

## SELECTABLE LED WATTAGE/CCT

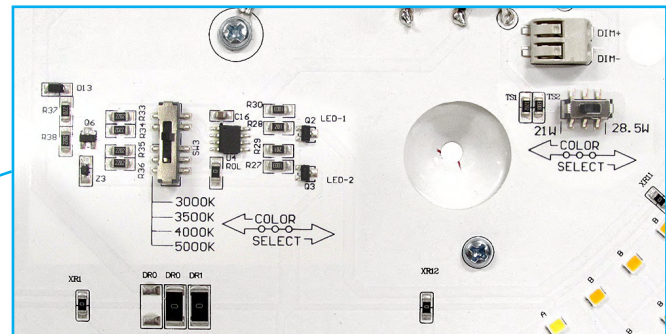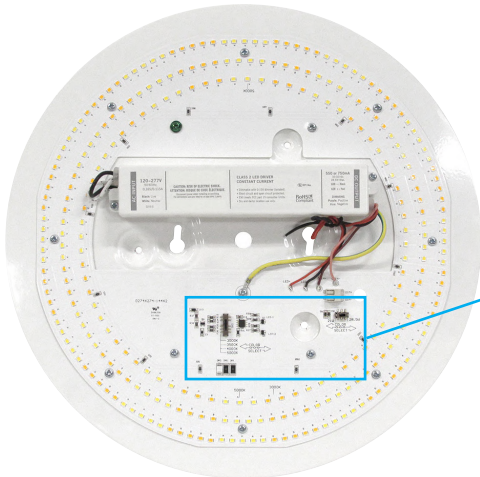

**Selectable LED Wattage/CCT Switches**  
 Located on LED Board