


Galileo Family Slim Styles ADA Compliant

We reserve the right to revise the design or components of any product without notice.


CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

ROUND	
Apollo	SM-AP
Artemis	SM-AT
Aurora	SM-AU
Aztec	SM-AZ
Cancer	SM-CA
Celestial	SM-CT
Classic	SM-CL
Cosmos	SM-CS
Galaxy	SM-GA
Hera	SM-HR
Leo	SM-LE
Libra	SM-LI
Lunar	SM-LU
Mars	SM-MAR
Mariner	SM-MR
Mercury	SM-ME
Orbit	SM-OR
Phoebus	SM-PH
Saturn	SM-ST
Uranus	SM-UR
Vega	SM-VA
Virgo	SM-VG
SQUARE	
Jupiter	SM-JU
Neptune	SM-NE
Orion	SM-ON
Solar	SM-SO
Tesla	SM-TS
Voyager	SM-VY
Zeus	SM-ZE
TRIANGLE	
Pisces	SM-PI
Pisces 2	SM-PI2
Quasar	SM-QU
Thor	SM-TH
Triton	SM-TR
Viking	SM-VK


ROUND DIFFUSER

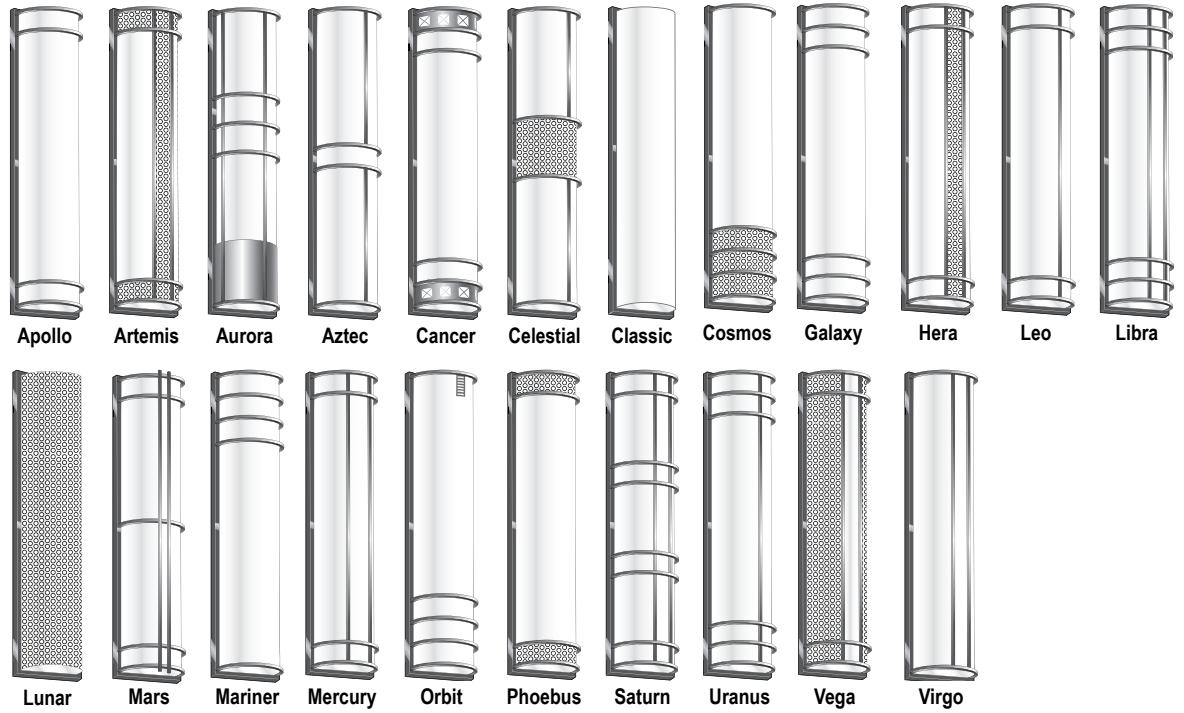

SQUARE DIFFUSER

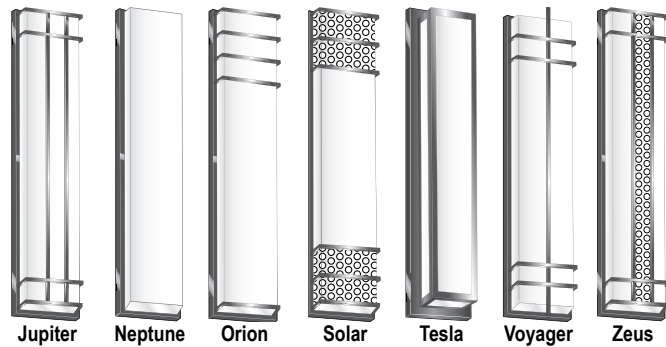

TRIANGULAR DIFFUSER

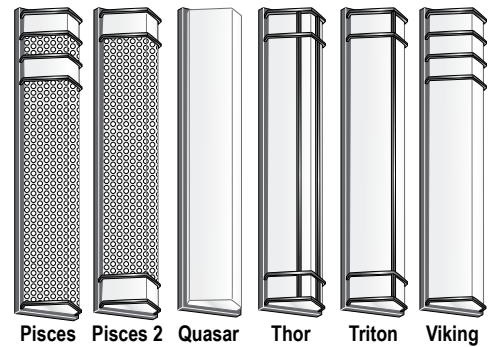

- Modular design: interchangeable diffusers and cages for rapid installation, relamping and maintenance, as well as the ability to design and build new luminaires to meet the exact needs or specifications. Allows you to boost and complement your design space.
- Three diffuser shapes: Round, Rectangular or Triangular
- Custom Color Matching
- Customizable sconces for design flexibility. Timeless and versatile to fulfill all aesthetic and performance needs.
- Standard Energy Efficient LED (Consult factory for Other Lamping)
- Weather and vandal resistant construction — Standard.
- Considerable range in sizes to perfectly match the scale requirements of the exterior and interior setting — ADA Compliant Depth.

Galileo Family Slim Styles ADA Compliant

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

ORDERING GUIDE:	Class	Style	Size	Center Wattage	UP/DN Wattage (Shielded Only)	CCT	CRI	Voltage	Finish	Options
	SM									

ORDERING INFO

STYLE

Refer to Index Page for Style Name/Code on Pg.1
SM-xx = Slim-xx = Style Code, ex: SM-AP)

SIZE

- XL1 = 5.5" Wide x 18" Tall x 4" Deep (Nominal)
- XL2 = 5.5" Wide x 26" Tall x 4" Deep (Nominal)
- XL3 = 5.5" Wide x 38" Tall x 4" Deep (Nominal)
- XL4 = 5.5" Wide x 51" Tall x 4" Deep (Nominal)

WATTAGE

Refer to Below Chart for Size / Wattage Compatibility
LED(xx) = LED (xx = Wattage, ex: LED15)

COLOR TEMPERATURE (CCT)

- 3K = ±3000K range LED
- 35K = ±3500K range LED
- 4K = ±4000K range LED
- 5K = ±5000K range LED

COLOR RENDERING INDEX (CRI)

80CRI = 80 Color Rendering Index (STANDARD)
90CRI = 90 Color Rendering Index (Not Available for 5K)

VOLTAGE

- 347 = 347 Volt
- UNV = Universal Volt (120-277v) Driver

STANDARD FINISH

- BK = Black Finish
- BZ = Bronze Finish
- PNA = Painted Natural Aluminum
- SGR = Silver Gray
- WH = White Finish

PREMIUM UPCHARGE FINISH

CC = Custom Color (Visit www.ralcolor.com)
— Provide RAL# or Make-to-Match Color Chip

INHIBITOR FINISH

+NAT = Epoxy Coating for Chlorine Environments
+OFC = Epoxy Coating for Ocean Front Environments

DIFFUSER OPTIONS

- CB = Clear Bottom
- CT = Clear Top
- CTB = Clear Top & Bottom
- GV = Gravura Custom Engraving (Consult Factory)
- OB = Open Bottom (indoor only)
- OQT = Opaque Top (No Up Light)
- OQB = Opaque Bottom (No Down Light)
- OQTB = Opaque Top & Bottom (No Up or Down Light)

PHOTOCELL OPTION

9328 = Photocell Button (120/277V) ②

CONTROL OPTIONS

MANUAL CONTROL (Wall Switch or Control System)
Note: 0-10V 100%-30% is Standard
D7A = 0-10VDC LED Dimming Driver (100-10%)
D7B = 0-10VDC LED Dimming Driver (100-1%)

BACK BOX OPTIONS (For Surface Conduit)

- BBX1 = 18" x 2" Backbox
- BBX2 = 26" x 2" Backbox
- BBX3 = 38" x 2" Backbox
- BBX4 = 51" x 2" Backbox

MISC OPTIONS

FUS = Single Fusing

EMERGENCY BATTERY OPTIONS ⑤ ⑥

Note: Emergency Battery options are for Center Light Only.

Meets California Energy Commission Title 20:

(CEC-400-2014-009-CMF) Efficiency Standards

- EL4W = Integral LED 4 Watt ②
- EL8W = Integral LED 8 Watt ②
- EL10W = Integral LED 10 Watt ②
- EL16W = Integral LED 16 Watt ②

REL4W = Remote LED 4 Watt

REL8W = Remote LED 8 Watt

REL10W = Remote LED 10 Watt

REL16W = Remote LED 16 Watt

Cold Weather Emergency Batteries:

Operating Temp: -20°C thru 50°C / NON-CEC Compliant

EL10W-CW = Integral LED 10 Watt (Cold Weather) ②

REL10W-CW = Remote LED 10 Watt (Cold Weather)

ACCESSORY OPTIONS (order as a separate line)

9002 = Tamperproof Screwdriver

NOTES:

- ② Backbox (BB) Required - Non-ADA compliant.
- ⑤ Max WHIP length of the REL is 8 feet.
- ⑥ Final selection of the Battery Pack under discretion of Factory

LAMP TYPE/QTY/WATTAGE					
Visit www.eclipselightinginc.com for available IES files					
Fixture Size		XL1	XL2	XL3	XL4
Dimensions - W x H x D		5½" x 18" x 4"	5½" x 26" x 4"	5½" x 38" x 4"	5½" x 51" x 4"
Light Emitting Diode (Required)	LED	LED15	LED20	LED30	LED40

Galileo Family Slim Styles ADA Compliant

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- BACKPLATE — 14 Ga. aluminum (AL).
- BACKBOX — 14 Ga. aluminum (AL) with wire access on four sides and back through 7/8" dia. KO flattened water tight (Optional for surface conduit entry or standard with emergency battery).
- CAGE — Square extruded aluminum bars permanently secured by hidden means to the frame. Standard configurations shown.
- DIFFUSER — White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8").
- DRIVER — Universal Volt (120-277v) electronic driver with 0-10VDC dimming is standard.
- FASTENERS — Stainless steel tamperproof screws —(2) To secure cage/frame in place.
- FINISH — Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
- GASKETING — High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
- MOUNTING — Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor. 7/8" KO in Center for Wire Access.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.



SLIM CLASS		
SIZE	DIMENSIONS	CENTER WATTS
XL1	5½"W X 18"H x 4"D	15W
XL2	5½"W X 26"H x 4"D	20W
XL3	5½"W X 38"H x 4"D	30W
XL4	5½"W X 51"H x 4"D	40W

