

RGBW VTA Series

Vapor-Tite Linear Luminaire


RGBW Color Tunable — WiZ Pro Wi-Fi Enabled

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- CONDUIT ENTRY — Standard housings available with one 7/8" conduit entry point on either or both ends.
- DRIVER — Universal voltage input, 120/277V electronic driver.
- GASKETING — Continuous perimeter poured gasket assures lens seal to housing.
- GEAR TRAY — 83% reflective, 22-Gauge pre-painted steel gear tray.
- HOUSING — Compression molded self-extinguishing fiberglass reinforced polyester housing with UL 5V flame rating (ASTM D635-74) F1 weatherability rating.
- LENS — Parking Garage Polycarbonate (PGP), Acrylic (PGA), Frosted (PGF). Low Profile Acrylic (LPA), Frosted (LPF).
- LIGHT ENGINE — RGBW LED Color tuning system - Linear Light Engines.
- MOUNTING — Standard stainless steel straps for surface mount is standard. Optional threaded pendant mounting or optional flush mounting bracket is available.
- SOFTWARE — WiZ Pro WiFi Control App (Android / IOS / Cloud)
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. Suitable for wet locations. IP67 Rated. IP69 Rated with Parking Garage Polycarbonate/Acrylic Lenses. Complies with Buy American Act.

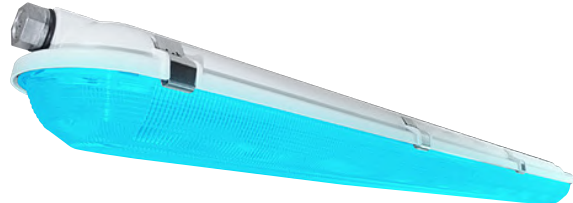

ORDERING INFO

Series	Length	Mounting	Lens Type	Voltage	Finish	Options
ORDERING GUIDE:						

SERIES

RW-VTA = RGBW VTA Color Tunable Luminaire

LENGTH

4 = 4-Foot Length

MOUNTING

STPB = Stainless Steel Strap Brackets (2-Pack) - STANDARD

HKIT = Hardware Kit

— Includes: Mounting Hook / Surface Mnt Bracket
Mounting Bracket / Hex Nut / Lock Wash

SKIT = Suspension Kit

— Includes: 2pc. Gripper Assembly / 10ft Cable

PEND = Two Stem Pendant Mount — 12" Standard

LENS TYPE

PGP = Parking Garage Polycarbonate Lens (3 3/4" Depth)

PGA = Parking Garage Acrylic Lens (3 3/4" Depth)

PGF = Parking Garage Frosted Lens (3 3/4" Depth)

LPA = Low Profile Acrylic Lens (3" Depth)

LPF = Low Profile Frosted Lens (3" Depth)

VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver

STANDARD FINISH

WH = White Finish

LATCH OPTIONS

CPL = Clear Polycarbonate Latches

WPL = White Plastic Latches

SSL = Stainless Steel Latches

TPSL = Tamperproof Stainless Steel Latches

TPWL = Tamperproof White Plastic Latches

PLUG OPTIONS

ALP = Die-Cast Aluminum Fitting Plug for 1/2" Rigid Conduit
— STANDARD

WDP = White Dry Location Plug

WRP = White Rubber Plug

ACCESSORY OPTIONS (order as a separate line)

REMT0030 = Remote for WiZ WiFi Control System

RED	25W
GREEN	25W
BLUE	25W
35K WHITE	53W


Note: Wattages shown are nominal.

The RGBW VTA Series features color tuning light engines which can be controlled via the iOS or Android WiZ Pro app. Various modes allow the user to adjust the brightness of the illumination at a neutral white color temperature or the color hue in any combination of RGB with a possible 16 million color settings.


The ability to customize your lighting gives the user the flexibility to personalize their illumination scheme according to their desired configuration which is applicable for holidays, themed events, location specific environments, and many more applications.

VTA 4-FOOT DIMENSIONS

Parking Garage Lens Dimensions

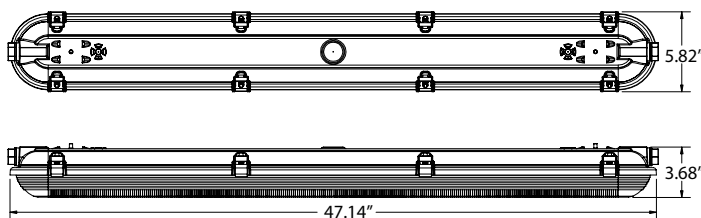

Low Profile Lens Dimensions

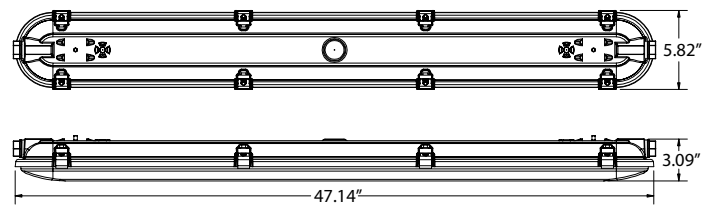

VTA-RGBW Series

Vapor-Tite/Weather Resistant
RGBW Color Tunable Linear Luminaire

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		


LENS TYPE



Parking Garage Polycarbonate (PGP)



Parking Garage Acrylic (PGA)



Parking Garage Frosted (PGF)




Low Profile Acrylic (LPA)




Low Profile Frosted (LPF)

PENDANT MOUNTING

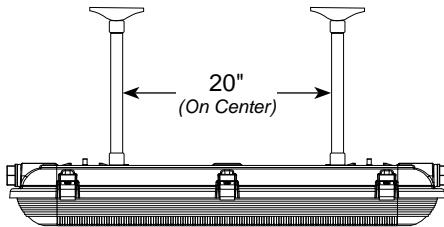


2-Foot

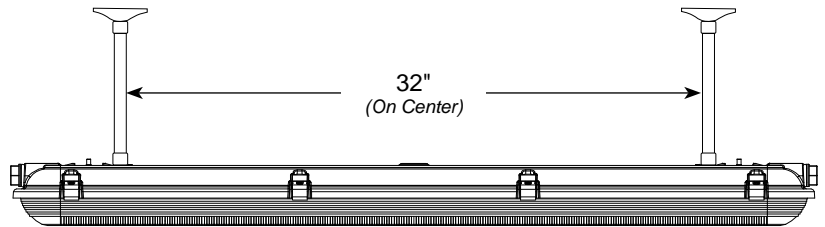



4-Foot

PLUG OPTIONS

Aluminum Plug (ALP)
STANDARD




White Dry Location Plug (WDP)




White Rubber Plug (WRP)

MOUNTING BRACKET OPTIONS


Strap Bracket (STPB)
STANDARD



Surface Mount
Assembly/Bracket
Included with
HKIT Option



Mounting Hook/Bracket
Included with HKIT Option



Suspension Kit (SKIT)

