

Linz

EURO/HIGH ABUSE SERIES

Wall Mount;
Open Style Available as Ceiling Mount
HID, CFL, LED

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		



Linz STYLE A:
Eyelid Wall Mount




Linz STYLE B:
Open (NO Eyelid) Wall Mount



Linz STYLE C:
Open (NO Eyelid) Ceiling Mount

SPECIFICATIONS

- DIFFUSER — Opalescent Polycarbonate Lens.
- DRIVER — 120/277 volt Electronic for LED.
- EMERGENCY — CFL, LED — Remote or Integral Emergency Battery.
- FINISH — Extremely durable oven baked Polyester Powder coat – Finishes include Bronze or White.
- HOUSING — Die-Cast Aluminum Housing and Open Front Frame, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating, Gasketed.
- REFLECTOR — White Powdercoat Steel Pan Reflector
- SOCKET — Plug-In Type
- MOUNTING — Surface Mount.
- LAMP — Super-Bright White LED, Max (2)42 Watt Compact Fluorescent with optional battery backup.
- Suitable for wet environments (requires 4-Point mounting)

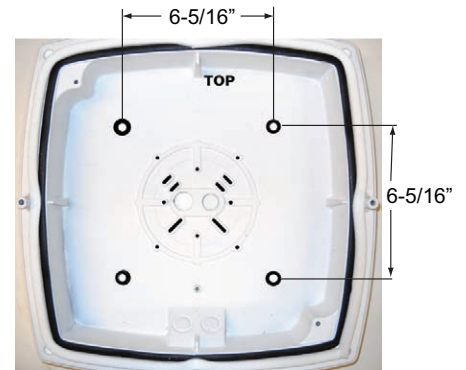

Linz Mounting Dimensions

LAMP TYPE/QTY/WATTAGE ¹				
Fixture		LZ-A	LZ-B	LZ-C
Dimensions - W x H x D		14" x 14" x 6 3/4"	14" x 14" x 5 3/4"	14" x 14" x 5 3/4"
Fluorescent Double Twin Tube	DTT	(2)26w		
Fluorescent Triple Twin Tube	TTT	(2)26/32/42w		
Ceramic Metal Halide Philips - CosmoPolis™	CMHC	60w (277V Standard) ¹ (2800K Color Temp Only)		
Light Emitting Diode	LED	20/30/40w	20/40/60w	

ORDERING GUIDE:

SERIES	STYLE	LAMP TYPE/QTY/WATT	VOLTAGE	COLOR TEMP	FINISH	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

NOTES:

- Consult Factory with requests regarding lamp sources, including LED, color temp., wattages or voltages not shown.
- Consult Factory for additional Emergency Battery options.
- Available with Step Dimming Option (CMHL) *Philips-Lumistep™*
Specify: "6" for 6hrs
"8" for 8hrs
"X" for 10hrs
- Requires remote mounting

SERIES

LZ = Linz Series

STYLE

- A = Linz Eyelid Wall Mount
- B = Linz Open (NO Eyelid) Wall Mount
- C = Linz Open (NO Eyelid) Ceiling Mount

LAMP TYPE/QUANTITY/WATTAGE

Refer to Chart Above

VOLTAGE/ POWER FACTOR

- 120 = 120 Volts
- 277 = 277 Volts
- EBU = Universal Volt (120-277v)
- 2EB = 2 Electronic Ballast for Dual Circuit CFL(2)26w, Specify Voltage

COLOR TEMP (LED)

- 3K = ±3000K range LED
- 4K = ±4000K range LED
- 5K = ±5000K range LED
- 6K = ±6000K range LED

FINISH

- BK = Black Finish
- BZ = Bronze Finish – Standard
- WH = White Finish

LED OPTIONS

- BL = Dual Circuit for Bi-Level light (High/Low)
- EC1 = (1) Three Watt LED for Emergency Circuit
- EC2 = (2) Three Watt LED for Emergency Circuit
- LDIM = 0-10V low-voltage dimming (100-30% Standard, Consult Factory for Other)
- REL61 = Remote Emergency Battery: LED 12W, approx. 720 Lumens (by lota)
- REL63 = Remote Emergency Battery: LED 23W, approx. 1290 Lumens (Bodine)
- REL67 = Remote Emergency Battery Cold Weather LED 23W, approx. 1290 Lms (lota)
- MSE = Motion Sensor External for LED, IND Specify Finish: White (WH) or Bronze (BZ)
- SG = 10KA Surge Protection for LED fixtures (meets ANSI spec. C62.41.2)

OPTIONS

- 9002 = Torx Tamperproof Screwdriver
- 9206 = Photocell – 120V²
- 9221 = Photocell – 277V²
- CMHL = Ceramic Metal Halide *CosmoPolis™* with Step Dimming: *Lumistep™* (Philips)²
- FUS = Single Fusing
- EMERGENCY OPTIONS³
 - EL2 = Integral Emergency Battery DTT/TTT; 1-2 Lamp; 650 Lumens
 - EL14 = Integral Emergency Battery DTT, TTT; 1 Lamp; 750 Lumens
 - REL2 = Remote Emergency Battery – see EL2
 - REL35 = Remote Emergency Battery Cold Weather TTT; 1-2 Lamp; 1250 Lms