

Mini Wall Light

Compact Low Profile Wall Light

Selectable LED 3-Wattage / 5-CCT or 5-RGB Settings

Adjustable Uplight/Downlight/Photocell

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- BEAM ANGLE — Swappable lens filter to modify beam angle.
- DRIVER — Universal Voltage 120/277V Electronic Driver.
- FINISH — Durable powdercoat finish applied over pre-treated surfaces.
- HOUSING — Aluminum (ADC12) die-cast housing shell.
- LIGHT ENGINE — Selectable LED wattage with Selectable CCT or RGB can be adjusted via switches.
- LIGHT DIRECTION — Light Direction (Up/Full/Down) can be adjusted via switches.
- LENS — Polycarbonate lens.
- MOUNTING — Universal mounting plate installs to J-Box or wall surface.
- OPERATING AMBIENT TEMP — -40°C to 50°C | -40°F to 122°F
- PHOTOCELL — Built-in Photocell with 300lx threshold. Can be turned On/Off via switch.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.
Mercury-free, UV-free, RoHS compliant parts. UL listed (UL1598) for wet locations. IP65 Rated.
- WARRANTY — 5-Year Limited Warranty.



ORDERING INFO

Series	Style	Wattage	CCT	Beam Angle	Voltage	Finish	Options

SERIES
MWL = Mini Wall Light Series

STYLE
S = Square
R = Round

WATTAGE
SLED = *Selectable LED Wattage
— SCCT Version: 15W | 20W | 25W
— SRGB Version: 10W | 15W | 20W

COLOR TEMPERATURE (CCT)
SCCT = *Selectable CCT: 2700K | 3000K | 3500K | 4000K | 5000K
SRGB = *Selectable RGB: Red | Green | Blue | Yellow | Purple
**Note: Fixtures will ship from factory at lowest wattage and warmest CCT or RGB Color. It is the installer's responsibility to set the fixture at the desired wattage and CCT/Color for their project.*

LENS FILTER
LF(x) = Lens Filter (x=Type; Example: LF10)
— See page 2 for Lens Filter/Beam Angles



VOLTAGE
UNV = Universal Volt (120-277v) Driver

STANDARD FINISH
BK = Black Finish
WH = White Finish

Selectable LED Wattage / Lumen Output			
Power Setting	Low Power	Medium Power	High Power
SLED-SCCT Wattage (Lumens)	15 Watt (630 Lumens) ^A	20 Watt (840 Lumens) ^A	25 Watt (1050 Lumens) ^A
SLED-SRGB Wattage (Lumens)	10 Watt (30 Lumens) ^B	15 Watt (45 Lumens) ^B	20 Watt (60 Lumens) ^B


Note ^A: Lumen output based on 42LPW at 4000K CCT.
Note ^B: Lumen output based on 3LPW with RGB Color.

DIMENSIONS

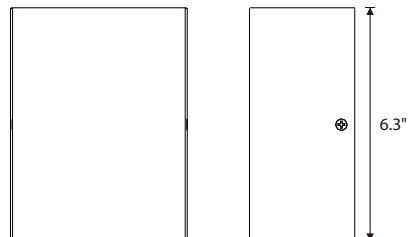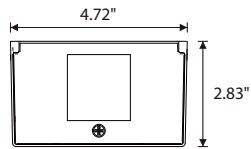

SELECTABLE CCT OR RGB

Selectable CCT (SCCT)

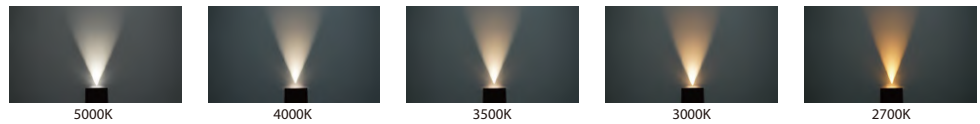

Selectable RGB (SRGB)



Mini Wall Light

Compact Low Profile Wall Light

Selectable LED 3-Wattage / 5-CCT or 5-RGB Settings

Adjustable Uplight/Downlight/Photocell

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		


SELECTABLE LED WATTAGE/CCT/PHOTOCELL/LIGHT DIRECTION

Photocell Settings	
ON / OFF	

Selectable CCT or RGB Settings	
2700K 3000K 3500K 4000K 5000K	
Red Green Blue Yellow Purple	

Selectable Wattage Settings	
SCCT	25 Watt 20 Watt 15 Watt
SRGB	20 Watt 15 Watt 10 Watt

Selectable Light Direction Switch	
DOWN	Downlight Only
UP	Uplight Only
FULL	Uplight and Downlight

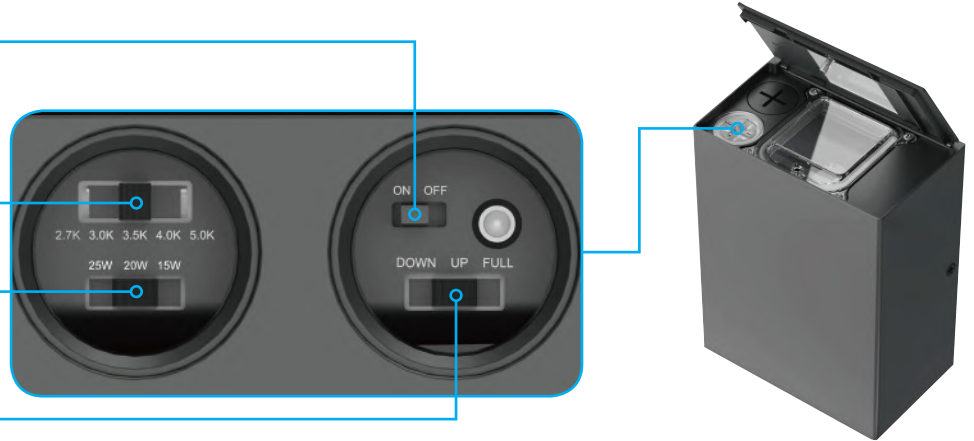

SWAPPABLE LENS FILTER (BEAM ANGLE MODIFIER)

