

Oxford 2

Low Profile Mini Wall Pack
Selectable Wattage / CCT / Photocell
IP65 / IK08 / ADA Compliant

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Universal Voltage 120/277v Electronic Driver with 0-10V dimming.
- FINISH — Corrosion resistant powder-coated finish.
- HOUSING — Die Cast Aluminum Housing.
- LENS — Impact Resistant UV-Stabilized Polycarbonate Diffuser.
- LIGHT ENGINE — Energy Efficient LED - Selectable Wattage / CCT with 153,000hr Lifetime (L70).
- MOUNTING — Wall Mount.
- OPERATING AMBIENT TEMPERATURE — -30°C to +50°C (-22°F to 122°F)
- PHOTOCELL — Built-in Photocell which can be switched On or Off.
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards.
 cETLus Listed, DLC Premium Listed, FCC Part 15, class A and ADA Compliant. IP65/IK08 Rated.
- WARRANTY — 5-Year Limited Warranty.



ORDERING INFO

ORDERING GUIDE:	Series	Wattage	CCT	Voltage	Finish	Options

SERIES

OX2 = Oxford 2

COLOR TEMPERATURE

SCCT = *Selectable CCT: 3000K | 4000K | 5000K

FINISH

BZ = Bronze Finish

WATTAGE

Refer to Below Chart for Wattage / Lumen Output
 SLED = *Selectable LED Wattage: 14W | 19W | 28W

VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver
 — 0-10V Dimming (100-10%)

**Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.*


Wattage / Lumens

Power Setting	Low			Medium			High		
CCT	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
Lumens	2,009	2,081	2,072	2,659	2,788	2,724	3,802	3,948	3,923
Wattage	14.4	14.05	14.58	19.27	18.73	19.07	28.13	27.47	28.64
Efficacy	139.51	148.11	142.11	137.99	148.85	142.84	135.16	143.72	136.98

Input Amps (A)

Power Setting	Low			Medium			High		
CCT	120V	240V	277V	120V	240V	277V	120V	240V	277V
3000K	0.12	0.06	0.05	0.16	0.08	0.07	0.23	0.12	0.10
4000K	0.12	0.06	0.05	0.16	0.08	0.07	0.23	0.11	0.10
5000K	0.12	0.06	0.05	0.16	0.08	0.07	0.24	0.12	0.10

DIMENSIONS

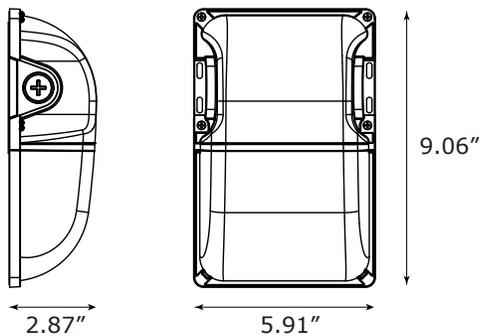

PHOTOMETRY

Luminaire Data		LCS Summary	
Total Lumens	3,325	Zone	Lumens
Input Wattage	28W	Forward Low (0-30)	452
Efficacy	118 lm/W	Forward Medium (30-60)	1108
Max Cd.	1405.632	Forward High (60-80)	638
IES Classification	Type IV	Forward Very High (80-90)	190
Longitudinal Classification	Very Short	Back Low (0-30)	206
BUG Rating	B1-U3-G2	Back Medium (30-60)	228
		Back High (60-80)	98
		Back Very High (80-90)	24
		Up Low (90-100)	139
		Up High (100-180)	240

