
# Aries 2

# Super Slim Galileo Sconce Narrow Rectangular Diffuser with Shield

CATALOG #	evise the design or components of any product without notice.	
CATALOG #		TYPE
PROJECT/LOCATION		
		1

#### **SPECIFICATIONS** -

- DRIVER Universal Volt (120-277v) electronic driver with 0-10V dimming is standard.
- BACKPLATE 16 Ga. aluminum (AL).
- DIFFUSER White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8'')
- SHIELD Solid Aluminum Opaque Shield with Optional Center-Cut Aperture along length of fixture - specify shield finish. Optional Color Window.
- FINISH Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
- GASKETING High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside
- FASTENERS Stainless steel tamperproof screws —(2) To secure lens in place.
- LIGHT ENGINE Energy Efficient Light Emitting Diode.
- MOUNTING Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor (no center access hole for J-Box mount). Must derate lamping for horizontal.
- COMPLIANCE Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.

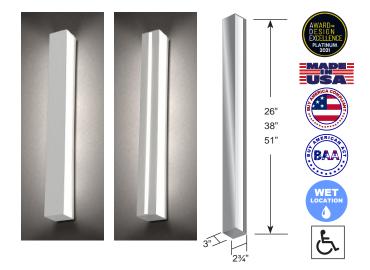

ORDERING INFO -

Series Size Wattage **CCT CRI** Voltage Finish **Options ORDERING GUIDE:** 

APPROVED BY

### **SERIES**

Al2 = Aries 2 Series

### SIZE

 $XL2 = 2\frac{3}{4}$ "W x 26"L x 4"D **XL3** =  $2\frac{3}{4}$ "W x 38"L x 4"D  $XL4 = 2\frac{3}{4}$ "W x 51"L x 4"D

# **LED WATTAGE**

**LED15** = 15 Watt LED **LED30** = 30 Watt LED

#### **COLOR TEMPERATURE (CCT)**

**3K** = ±3000K Range

35K = ±3500K Range

**4K** = ±4000K Range

5K = ±5000K Range

#### **COLOR RENDERING INDEX (CRI)**

80CRI = 80 Color Rendering Index (STANDARD)

90CRI = 90 Color Rendering Index (Not Available for 5K)

#### **VOLTAGE**

UNV = Universal Volt (120-277v) Electronic Driver

### **FINISH**

BK = Black Finish

BZ = Bronze Finish

PNA = Painted Natural Aluminum

SGR = Silver Gray

WH = White Finish

CC = Custom Color (Visit www.ralcolor.com)

- Provide RAL# or Make-to-Match Color Chip

#### **DIMMING OPTIONS**

Note: 0-10V 100%-30% is Standard

**D7A** = 0-10VDC LED Dimming Driver (100-10%)

**D7B** = 0-10VDC LED Dimming Driver (100-1%)

### **SHIELD OPTIONS**

CW = Center Window

Color Options:

AM = Amber

BL = BlueGN = Green

RD = Red

WH = WHCC = Custom Color (Consult Factory)

## MISC OPTIONS

FUS = Single Fusing

### EMERGENCY BATTERY OPTIONS®®

<u>Meets California Energy Commission Title 20:</u> (CEC-400-2014-009-CMF) Efficiency Standards

REL8W = Remote LED 8 Watt

REL10W = Remote LED 10 Watt REL16W = Remote LED 16 Watt


# ACCESSORY OPTIONS (order as a separate line)

9002 = Tamperproof Screwdriver

#### NOTES:

Max WHIP length of the REL is 8 feet.

55 Final selection of the Battery Pack under discretion of Factory

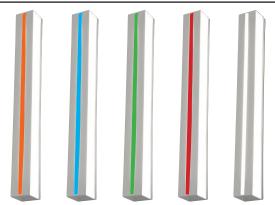

SIZE / LED WATTAGE						
Fixture Size		XL2	XL3	XL4		
Dimensions - W x H x D		2¾" x 26" x 4"	2¾" x 38" x 4"	2¾" x 51" x 4"		
Light Emitting Diode	LED	LED15	LED30	LED30		

