

# 575-N

## Vandal Resistant Narrow Linear Fixture Selectable LED Wattage / CCT Corner Mount / Wet Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- CORNER BRACKET — 20 ga Die-Formed Aluminum with spot welded end caps.  
End Caps include knock outs for surface conduit.
- DRIVER — Universal volt (120-277v) electronic driver.
- FASTENERS — Flat head stainless steel torx screws.
- FINISH — Polyester powder coated finish.
- HOUSING — Aluminum housing and heatsink.
- LENS — Polycarbonate translucent lens for uniform light distribution.
- LIGHT ENGINE — Energy Efficient LED - Selectable or Static Wattage / CCT.
- MOUNTING — Mounts to ceiling via corner bracket.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.  
Complies with CE, CB, SAA, and the Buy American Act (BAA). ETL listed and suitable for indoor wet locations (covered ceiling).
- WARRANTY — 5-year Limited Warranty.



### ORDERING INFO - SELECTABLE WATTAGE/CCT SERIES

ORDERING GUIDE:	Series	Size	Wattage	CCT	Voltage	Finish	Options
			SLED	SCCT	UNV		

#### SERIES

575-N = 575 Narrow Corner Mount Linear Luminaire

#### SIZE

2 = 2-Foot Length  
4 = 4-Foot Length

#### WATTAGE

SLED = \*Selectable LED Wattage  
— 2-Foot: 20W | 30W | 40W  
— 4-Foot: 35W | 42W | 50W

#### COLOR TEMPERATURE (CCT)

SCCT = \*Selectable CCT: 3000K | 4000K | 5000K

\*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

#### VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver  
— Non-Dimmable

#### STANDARD FINISH

WH = White Finish

#### PREMIUM UPCHARGE FINISH

BK = Black Finish  
BZ = Bronze Finish  
SGR = Silver Gray Finish  
CC = Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
— Provide RAL# or Make-to-Match Color Chip

#### SENSOR OPTIONS

OCC = Occupancy Sensing | Motion Sensor Integral <sup>20</sup>  
— Standby Dim Level Presets: ON/OFF (0%/100%)

#### EMERGENCY BATTERY OPTIONS

EL10W = Integral 10 Watt Emergency Battery

#### MISC OPTIONS

TDM = Tandem Joined Fixtures

### ORDERING INFO - STATIC WATTAGE/CCT SERIES

ORDERING GUIDE:	Series	Size	Wattage	CCT	Voltage	Finish	Options
					UNV		

#### SERIES

575-N = 575 Narrow Corner Mount Linear Luminaire

#### SIZE

2 = 2-Foot Length  
4 = 4-Foot Length

#### WATTAGE

Note: Refer to Below Chart for Size / Wattage Compatibility  
LED(xx) = LED (xx = Wattage, ex: LED40)

#### COLOR TEMPERATURE (CCT)

3K = ±3000K range LED  
35K = ±3500K range LED  
4K = ±4000K range LED  
5K = ±5000K range LED

#### VOLTAGE

UNV = Universal Volt (120-277v) Electronic Driver  
— 0-10V Dimming (100-30%) is Standard

#### STANDARD FINISH

WH = White Finish

#### PREMIUM UPCHARGE FINISH

BK = Black Finish  
BZ = Bronze Finish  
SGR = Silver Gray Finish  
CC = Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
— Provide RAL# or Make-to-Match Color Chip

#### CONTROL OPTIONS (Choose from Manual or Sensor)

MANUAL CONTROL (Wall Switch or Control System)

Note: Cannot be used with Sensor Controls

Note: 0-10V (100-30%) Dimming is Standard  
D7A = 0-10VDC LED Dimming Driver (100-10%)  
D7B = 0-10VDC LED Dimming Driver (100-1%)

OR  
(See Sensor Control Options)

#### Sensor Control (Sensor Integral to Fixture)

Note: Cannot be used with Manual Controls

OCC = Occupancy Sensing | Motion Sensor Integral <sup>20</sup>  
— Standby Dim Level Presets: ON/OFF (0%/100%)

BLD = Bi-Level Dimming | Motion Sensor Integral <sup>20</sup>  
— Standby Dim Level Presets:  
10% / 20% / 30% (Standard) / 50%

#### EMERGENCY BATTERY OPTIONS

EL10W = Integral 10 Watt Emergency Battery

#### MISC OPTIONS

TDM = Tandem Joined Fixtures

#### ACCESSORY OPTIONS (order as a separate line)

REMT0019 = Remote Controller for BLD Sensor Option

Fixture		2-Foot	4-Foot
Light Emitting Diode	LED	20W / 30W / 40W	30W / 40W / 50W

#### NOTES:

<sup>20</sup> Max mounting height is 18' (18 feet).



575-N


Vandal Resistant Narrow Linear Fixture  
Selectable LED Wattage / CCT  
Corner Mount / Wet Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

DIMENSIONS

2-Foot

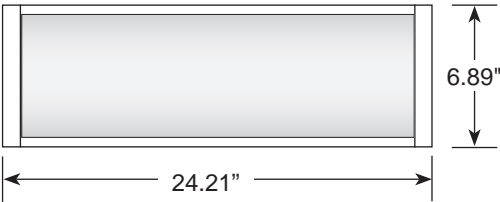

4-Foot

