

# GS10S

## Garage or Canopy 10" Square Luminaire Selectable LED Wattage / CCT IP65 Rated / Wet Location

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

### SPECIFICATIONS

- DRIVER — Universal Voltage (120~277V) electronic driver with 0-10V Dimming.
- HOUSING — Die cast aluminum housing with built-in heatsink fins for optimal thermal management.
- LENS — Clear ribbed optical lens with 150° beam angle.
- LIGHT ENGINE — Energy Efficient LED - Selectable Wattage / CCT. >50,000 Hours Lifespan.
- MOUNTING — Mounting plate directly mounts to ceiling or J-BOX is standard.  
Optional Pendant Mount.
- OPERATING TEMPERATURE — -40°C~45°C (-40°F TO +113°F)
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards.  
UL, FCC Certified. IP65 Rated, Suitable for Wet Locations.
- WARRANTY — 5 Year Limited Warranty.



The **Bluetooth®** word mark and logos are registered trademarks owned by **Bluetooth®** SIG, Inc.

### ORDERING INFO

	Series	Mounting	Wattage	CCT	Voltage	Finish	Options
ORDERING GUIDE:							

#### SERIES

**GS10S** = Garage or Canopy 10" Square Luminaire

#### MOUNTING

**SM** = Surface Mount (w/Mounting Plate)

**PEND12-SWC-RR** = Pendant 12" Length Conduit Stem (1/2" IPS)

— Includes Swivel Canopy for 4" Round Box

**PEND12-SWC-SR** = Pendant 12" Length Conduit Stem (1/2" IPS)

— Includes Swivel Canopy for 4" Square Box

#### WATTAGE

**SLED-H** = \*Selectable LED - High: 60W | 80W | 100W

#### COLOR TEMPERATURE (CCT)

**SCCT** = \*Selectable CCT: 3500K | 4000K | 5000K

*\*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.*

#### VOLTAGE

**UNV** = Universal Volt (120-277v) Electronic Driver  
— 0-10V Dimmable

#### STANDARD FINISH

**BZ** = Bronze Finish

#### PREMIUM UPCHARGE FINISH

**BK** = Black Finish

**PNA** = Painted Natural Aluminum

**WH** = White Finish

#### SENSOR OPTIONS

**OCC** = Occupancy Sensing | Microwave Motion Sensor  
— Plug-and-Play Installation

**OCC-B** = Occupancy Sensing - **Bluetooth®** Enabled Sensor  
— Plug-and-Play Installation


**PIR** = Occupancy Sensing | PIR Motion Sensor  
— Plug-and-Play Installation

#### EMERGENCY BATTERY OPTIONS

**EL8W** = 8 Watt LED Emergency Battery  
— 90min Battery Time / 24hr Charge Time

Power Setting	Low	Medium	High
<b>SLED-H</b>	60W (7,800 Lumens)	80W (10,400 Lumens)	100W (13,000 Lumens)

### DIMENSIONS

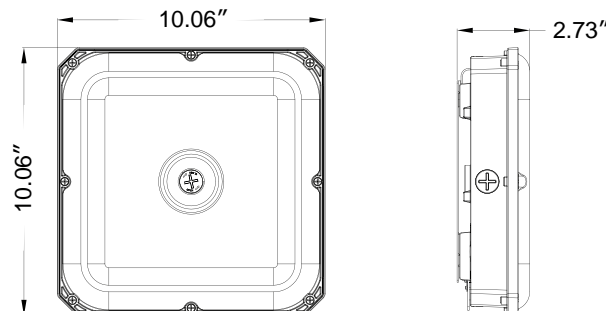

# GS10S

**Garage or Canopy 10" Square Luminaire**  
**Selectable LED Wattage / CCT**  
**IP65 Rated / Wet Location**

We reserve the right to revise the design or components of any product without notice.

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

## SELECTABLE WATTAGE/CCT CONTROLLER



## MOUNTING



Surface Mount (SM)



Pendant Mount (PEND)

### Swivel Canopy Types for Pendant Mount



Swivel Canopy 4" for  
Round/Octagonal J-BOX  
(SWC-RR)



Swivel Canopy 4" for  
Square J-BOX  
(SWC-SR)


## OPTIONS



**Microwave Motion Sensor (OCC)**  
*Plug-and-Play Installation*



**PIR Motion Sensor (PIR)**  
*Plug-and-Play Installation*

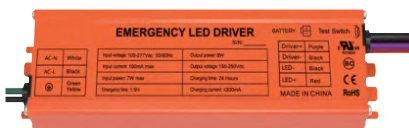

**8 Watt Emergency Battery (EL8W)**  
 90min Battery Time / 24hr Charge Time

GS10S

Garage or Canopy 10" Square Luminaire

Selectable LED Wattage / CCT


IP65 Rated / Wet Location

We reserve the right to revise the design or components of any product without notice.


CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

PHOTOMETRY

Photometric Tested Model Wattage/CCT: 100W / 5000K

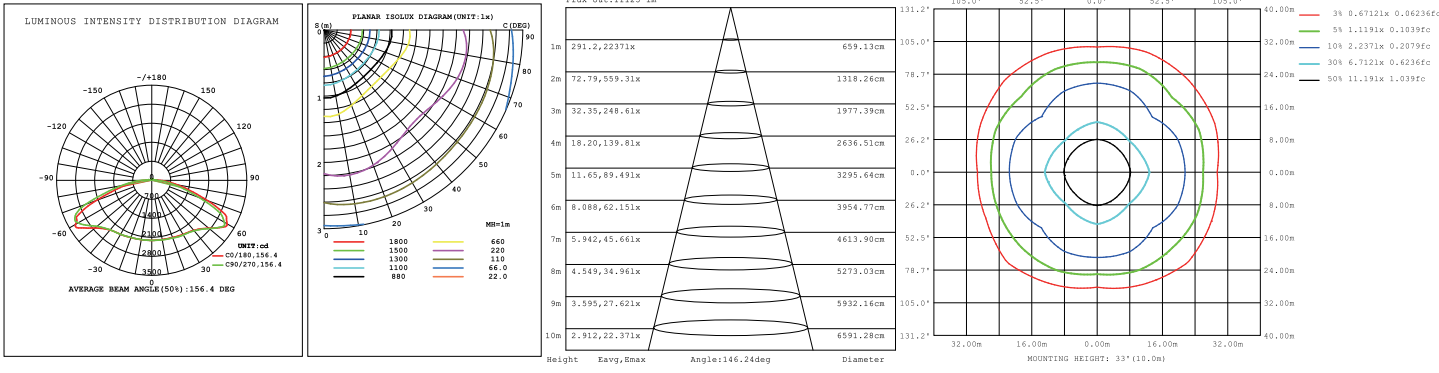

Photometric Tested Model Wattage/CCT: 80W / 5000K

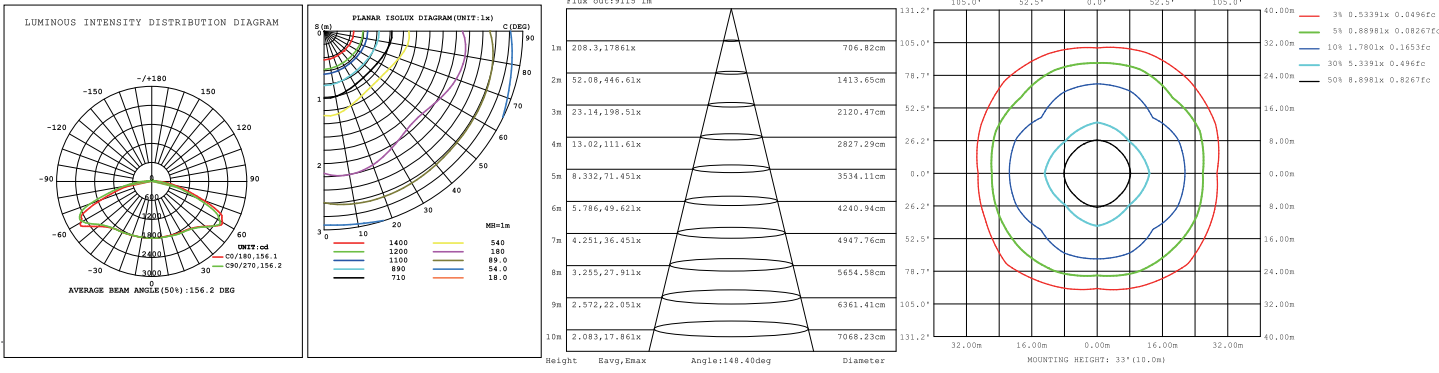

Photometric Tested Model Wattage/CCT: 40W / 5000K

