

Solar Wall Pack Light

Solar Powered Wall Pack Luminaires
Integrated Smart Microwave Motion Sensor
Wet Location Rated

CATALOG #		TYPE
PROJECT/LOCATION		
APPROVED BY		

SPECIFICATIONS

- DRIVER — Driver with 0-10V dimming (100-20%).
- FINISH — Durable finish.
- HOUSING — Rugged die-cast aluminum housing.
- LENS — Clear Prismatic Lens.
- LIGHT ENGINE — Energy efficient LED.
- MOTION SENSOR — Integrated smart microwave motion sensor with photocell capability.
- OPERATIONAL TEMP — -20°C to 40°C | -4°F to 104°F
- SOLAR BATTERY — 8-Hour Charge Time | >1000 Battery Cycles
- COMPLIANCE — Built to comply with U.S. and Canadian safety standards. UL listed for wet locations.
- WARRANTY — 3-Year Limited Warranty.



ORDERING INFO

ORDERING GUIDE:	Series	Size	Wattage	CCT	Voltage	Finish	Options

SERIES

SWP = Solar Wall Pack Light

SIZE

S = Small: 8.8" W x 9.8" H x 5.7" D
 L = Large: 13.9" W x 16.5" H x 8.3" D

WATTAGE

LED12 = 12 Watt LED (Size Small Only)
LED35 = 35 Watt LED (Size Large Only)

COLOR TEMPERATURE (CCT)

5K = 5000K (70CRI)

VOLTAGE


UNV = Driver (100-20% Dimming)

STANDARD FINISH

BK = Black Finish
BZ = Bronze Finish

Model Size	Power (W)	Lumens (lm)	CCT (K)	LPW
Small	12W	1500LM	5000K	125
Large	35W	4000LM	5000K	114

DIMENSIONS

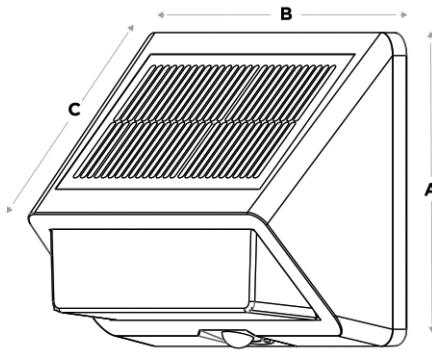

Model Size	Height (A)	Width (B)	Depth (C)
Small	9.8 in	8.8 in	5.7 in
Large	16.5 in	13.9 in	8.3 in

REMOTE CONTROLLER

