

WM-FSM Series

Vandal Resistant Wall Pack Luminaire
Field Selectable Wattage/CCT
Wet Location

We reserve the right to revise the design or components of any product without notice.

| | | |
|------------------|--|------|
| CATALOG # | | TYPE |
| PROJECT/LOCATION | | |
| APPROVED BY | | |

SPECIFICATIONS

- DRIVER — Universal Volt 120/277V electronic driver with 0-10V low voltage dimming (100-30%).
- EMERGENCY — Optional 8W Emergency Battery is available.
- FINISH — Weatherproof polyester powder coated finish.
- HOUSING — Die-cast aluminum, corrosion-resistant housing which conducts heat for optimal thermal management. Housing is fully-sealed which prevents moisture and external elements from contaminating the internal components.
- LENS — UV stabilized polycarbonate prismatic lens design provides optimal light distribution and uniformity.
- LIGHT ENGINE — Energy efficient LED - Field Selectable Wattage / CCT. (50,000hr lifespan)
- OPERATING TEMPERATURE — -40°C to 40°C / -40°F to 104°F.
- MOUNTING — Wall mounts to J-BOX via separate mounting plate.
- PHOTOCELL — Optional 120~277V Photocell is available.
- COMPLIANCE — Built to comply with U.S. and Canadian Safety Standards. UL/cUL Listed for Wet Locations.
- WARRANTY — 5-year Limited Warranty.



ORDERING INFO

| Series | Wattage | CCT | Voltage | Finish | Options |
|-----------------|---------|-----|---------|--------|---------|
| ORDERING GUIDE: | | | | | |

SERIES

WM-FSM = WM Field Selectable Series

WATTAGE

Note: See Chart for Wattage/Lumen Output

SLED = *Selectable LED Wattage: 30W | 50W | 70W | 90W

COLOR TEMPERATURE (CCT)

SCCT = *Selectable CCT: 3000K / 4000K / 5000K

*Note: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

VOLTAGE

UNV = Universal Volt (120-277v) Driver

STANDARD FINISH

BZ = Bronze Finish

PHOTOCELL OPTION

9328 = Photocell


EMERGENCY BATTERY OPTION

EL8W = Integral Emergency LED Battery 8 Watt

- 900 Lumens
- 90 Minute Backup Time
- Operating Temp: 10°C to 40°C / 50°F to 104°F

| Setting | System Wattage | CRI | Lumens (3000K) | LPW (3000K) | Lumens (4000K) | LPW (4000K) | Lumens (5000K) | LPW (5000K) |
|---------|----------------|-----|----------------|-------------|----------------|-------------|----------------|-------------|
| Level 1 | 90W | 80 | 12,000lm | 133 lm/W | 12,500lm | 139 lm/W | 12,200lm | 136 lm/W |
| Level 2 | 70W | 80 | 9800lm | 140 lm/W | 10,200lm | 145 lm/W | 9900lm | 142 lm/W |
| Level 3 | 50W | 80 | 7500lm | 150 lm/W | 7800lm | 155 lm/W | 7600lm | 152 lm/W |
| Level 4 | 30W | 80 | 4800lm | 160 lm/W | 5000lm | 165 lm/W | 4900lm | 162 lm/W |

DIMENSIONS

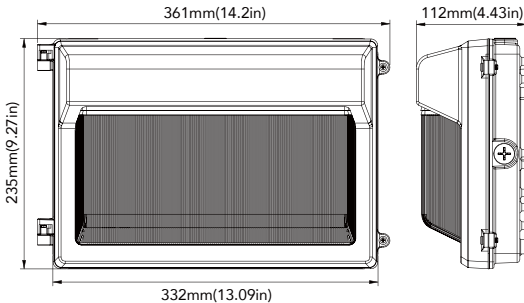


WM-FSM Series

Vandal Resistant Wall Pack Luminaire
Field Selectable Wattage/CCT
Wet Location

We reserve the right to revise the design or components of any product without notice.

| | | |
|------------------|--|------|
| CATALOG # | | TYPE |
| PROJECT/LOCATION | | |
| APPROVED BY | | |

SELECTABLE WATTAGE / CCT CONTROLLER

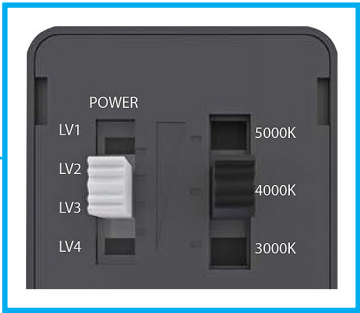

Selectable Wattage / CCT Controller

Located on the side of the fixture with easy access through the removable screw plug.

Allows the user to make adjustments to the wattage and CCT via the dip switches in the field without a third-party service.

OPTIONS



Optional Photocell

Located on top of the fixture with easy access through the removable screw plug.

Allows the user to enable or disable the photocell by adjusting the dipswitch in the field without a third-party service.



Optional Emergency Battery

8 Watt Emergency Battery provides 900 lumens of light for 90 minutes.